

MEMBRANE ELEMENT DATA SHEET

BW-8040

INDUSTRIAL LOW PRESSURE REVERSE OSMOSIS MEMBRANE ELEMENT

Performance	Permeate flow:	37.9 m ³ /day
	Salt rejection:	
	Nominal	99.0%
	Minimum	98.0%


Test conditions: 1500 mg/l NaCl, solution at 1.03 MPa applied pressure, temperature 25 °C and recovery of 15%
Stated performance may vary by ± 15% from the data shown

Features	Active membrane area	37 m ²
	Membrane chemistry	Polyamide thin film composite
	Module construction	Spirally wound
	Applications	Low pressure demineralisation

Operating and design information	Typical operating pressure	0.8 – 1.2 MPa
	Design flux ¹	10 - 30 l/mh
	Maximum operating pressure	4.1 MPa
	Maximum feedwater flow per vessel	284 l/min (17.0 m ³ /hour)
	Maximum operating temperature	45 °C
	Maximum feed turbidity	1 NTU
	Maximum feed SDI (15 minute)	5
	Maximum differential pressure per element	70 kPa
	Maximum free chlorine	<0.1 mg/l (dechlorination essential)
	pH range continuous operation	2 - 11
pH range short term cleaning	2 – 12 (@ 35 °C max)	

Sales, service and technical support
Hidrotek industrial reverse osmosis membranes are distributed in the United Kingdom and Ireland by Micro-Membrane Systems Ltd, Unit 6 Unity Court, Unity Road, Bristol BS31 1FU
Tel: +44(0)117 986 1652 info@micromembrane.co.uk

Dimensions

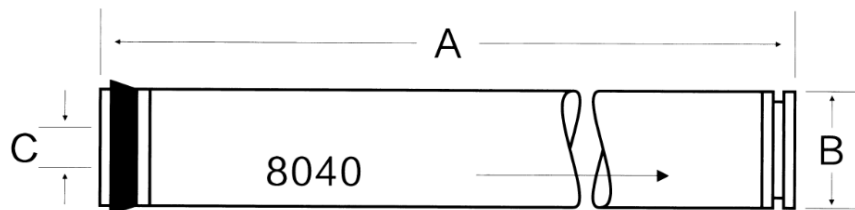

A=1016.0mm(40") B=201.9mm(7.95") C=28.6mm(1.125")

¹ Please contact us for application specific design data

Information in this data sheet may change without notice and is considered accurate but does not imply any warranty of performance. No liability is assumed or implied for the application of the data presented herein. Customers are responsible for determining the suitability of this product for any particular end use.